

SPIKE GRAFIET 1100 LED + UPLIGHT + STOPCONTACT FR/BL 623915



TECHNISCHE GEGEVENS

Driver:	-
LED:	12,5W 230V 50/60Hz (AC LED) 1100 lm + 6,5W GU10 230V 350 lm
Totaal toestel:	19W
Lumen output (lm):	800 / 80
Kleurtemperatuur:	3000K
Kleurweergave index:	CRI(KwI)>80
MacAdams (SDCM)	3-step / 4-step
Bundelhoek:	100 / 10
Branduren:	50 000 (L70)
Dimbaar:	Ja
Ballast:	-
Isolatieklasse:	CL I
IP:	IP44/IP20

AFMETINGEN: (mm)

Breedte:	171
Diepte:	155
Hoogte:	173


MATERIALEN

Behuizing:	Aluminium
Lens:	UV gestabiliseerd polycarbonaat

VERPAKKING



Verpakkingseenheid:	1
Oververpakking	8

AFBEELDING:

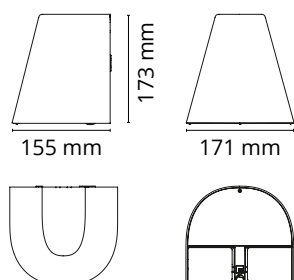

AFSTAND:

Minimale afstand tot
brandbaar materiaal:

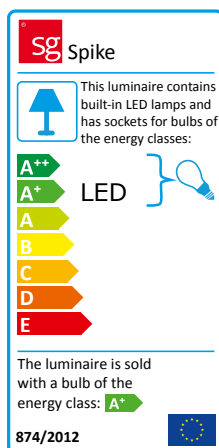

VERVANG DE LICHTBRON

Dit toestel bevat een ingebouwde
LED-lichtbron.

Vervanging van lichtbron
UITSLUITEND door vakman.

